

AF030B0203A

A

HIGH POWER BeO ATTENUATOR

SPECIFICATIONS


FILE ATNOUT

POWER MAX
(WATTS)

30 CW


ATTENUATION:

20 dB (±0.5dB)

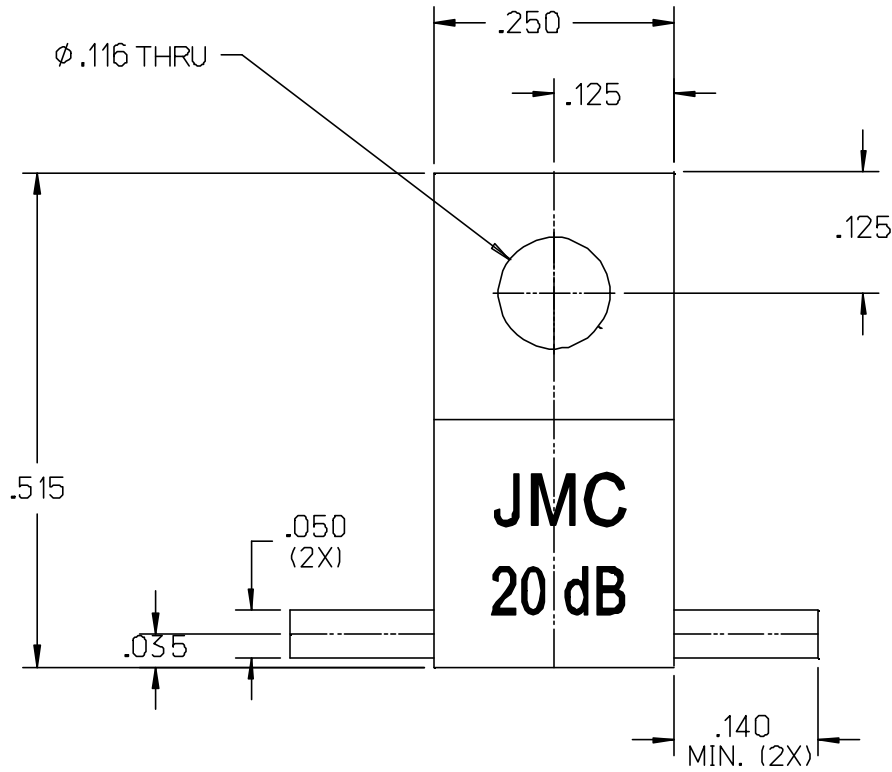

CAUTION

**THIS SUBSTRATE USES BERYLLIUM OXIDE
USE CARE WHEN HANDLING.
DO NOT SCRATCH OR ABRASIVE
TRIM IN OPEN AREA.**

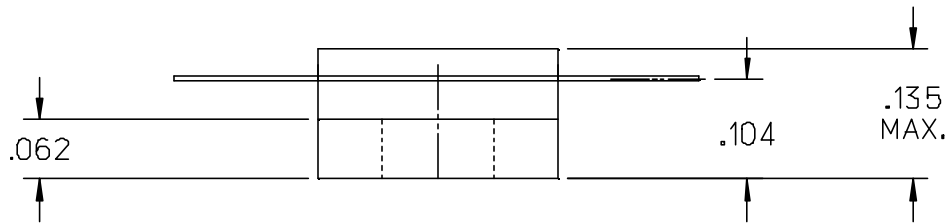

A	8/03/07	SAF	-	-	000574
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
SAF	MAI	MAI	5" = 1"
DATE	DATE	DATE	.XX ± .015
8/03/07	08/06/07	08/06/07	.XXX ± .010



JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION