

ATT. "XX"	TOLERANCE	VSWR
1dB	(±1.0 dB)	1.25 : 1
3dB	(±1.0 dB)	1.25 : 1
4dB	(±1.0 dB)	1.25 : 1
5dB	(±1.0 dB)	1.25 : 1
6dB	(±1.0 dB)	1.25 : 1
9dB	(±1.0 dB)	1.25 : 1
10dB	(±1.0 dB)	1.25 : 1

MJ DRG. NO.


AF100A0XX04-001B

REV.

# AF100A0XX04-001 B

## ATTENUATOR FLANGED, HIGH POWER, ALN

SPECIFICATIONS	FILE ATTNOUT
POWER MAX (WATTS):	100 CW
FREQUENCY	DC - 3GHz
DIMENSIONS IN BRACKETS IN [mm]	

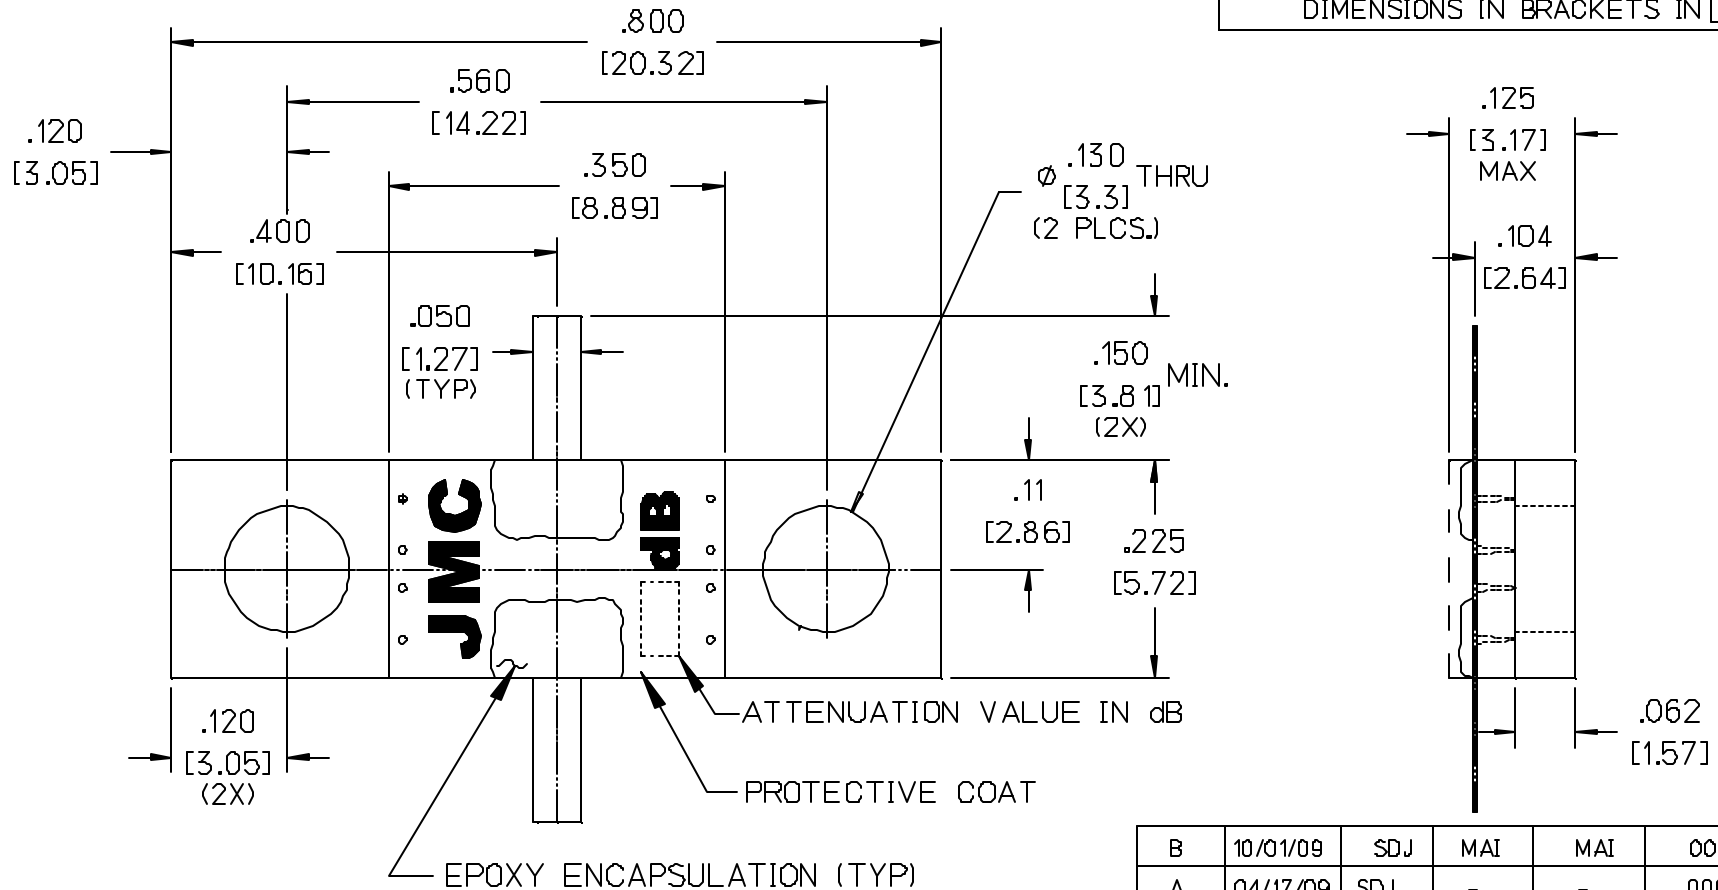

B	10/01/09	SDJ	MAI	MAI	000798
A	04/17/09	SDJ	-	-	000763
LEVEL	DATE	DRN.	CHK.	APP.	ECN

### REVISIONS

DRN.	CHK.	APP.	SCALE
SDJ	SDJ	MAI	5" - 1"
DATE	DATE	DATE	.XX±.015 [38]
04/17/09	04/15/09	06/09/09	.XXX±.010 [254]



### JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BOUNTON, N.J. 07005 (973)334-2676 FAX (973)334-2954  
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL