


AF100B0XX04 D

HIGH POWER BeO ATTENUATOR

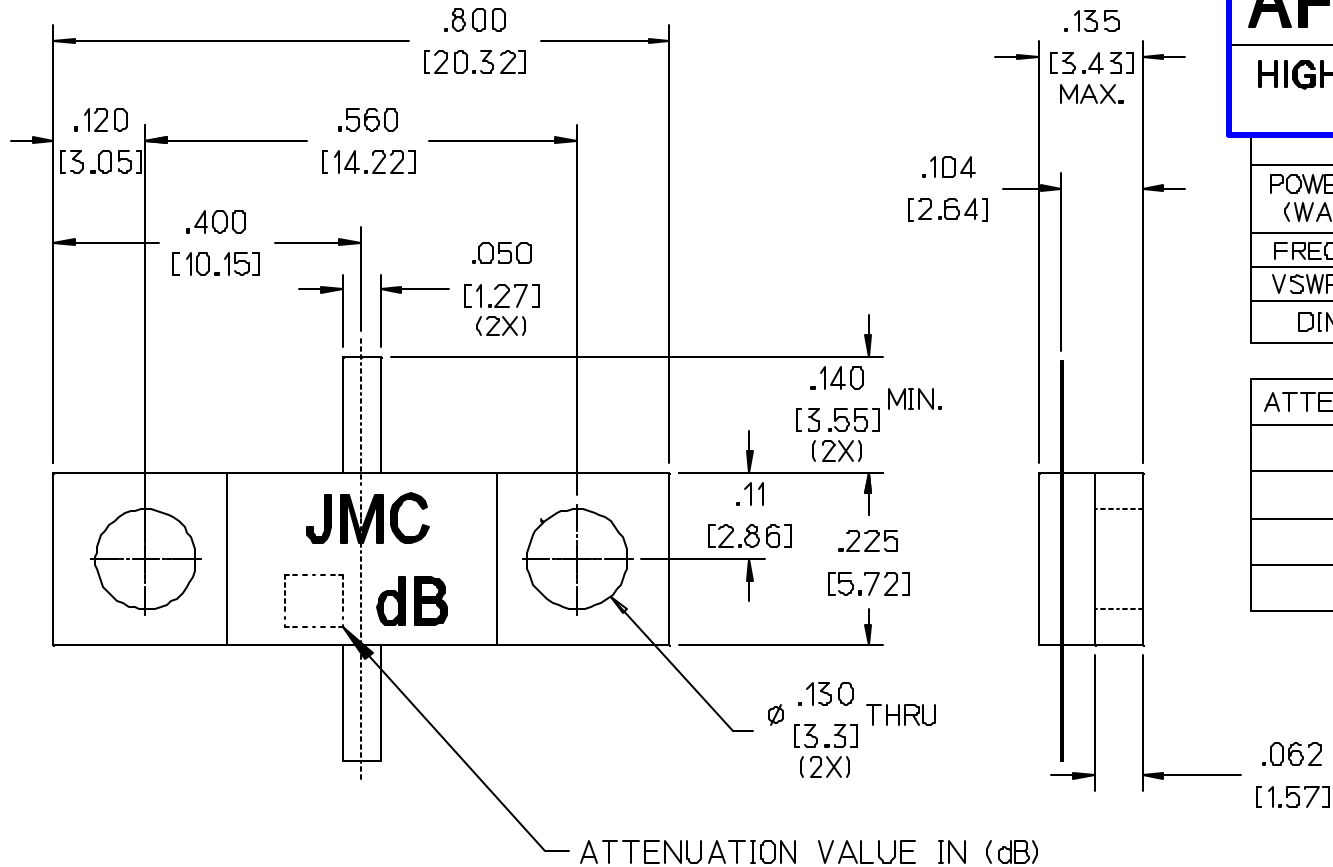

SPECIFICATIONS		FILE	ATNOUT
POWER MAX (WATTS)	100 CW		
FREQUENCY:	DC-3GHz		
VSWR:	<1.25		
DIMENSIONS IN BRACKETS IN [mm]			

ATTENUATION "XX"	TOLERANCE
01 - 05	dB (±.4)
06 - 10	dB (±.3)
11 - 20	dB (±.5)
21 - 30	dB (±1)

CAUTION
 THIS SUBSTRATE USES BERYLLIUM OXIDE
 USE CARE WHEN HANDLING.
 DO NOT SCRATCH OR ABRASIVE
 TRIM IN OPEN AREA.

D	04/27/09	SDJ	SDJ	MAI	000763
C	10/10/08	SDJ	SDJ	MAI	000721
B	01/31/08	SDJ	SDJ	MAI	000643
A	08/02/07	SAF	-	-	000574
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS					
DRN.	SAF	CHK.	MAI	APP.	MAI
SCALE	4" - 1"				
DATE	08/02/07	DATE	08/06/07	DATE	08/06/07
				.XX±.015 [3.8]	XXX±.010 [2.54]



JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
 ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION