


AF150B00104 B

HIGH POWER BeO ATTENUATOR

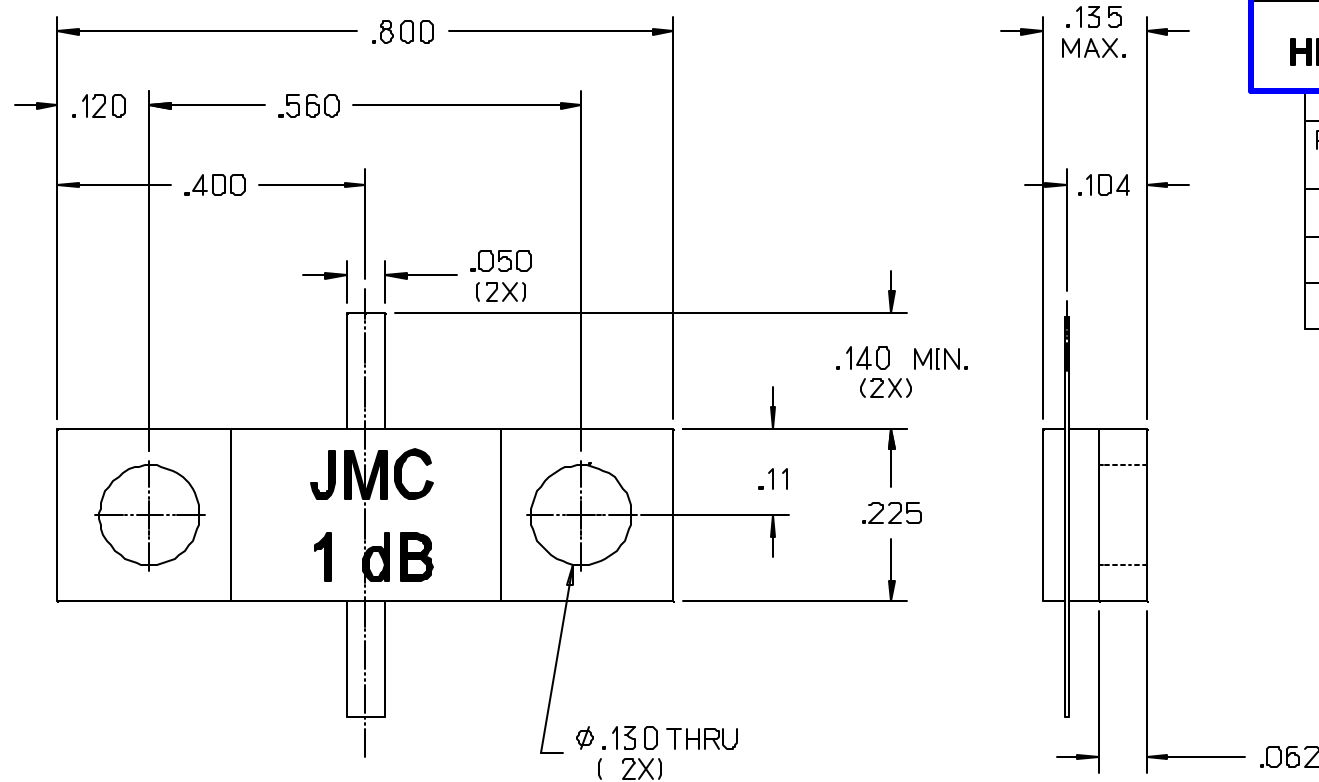

SPECIFICATIONS		FILE	ATNOUT
POWER MAX (WATTS):	150 CW		
ATTENUATION	1 dB (± 0.2 dB)		
FREQUENCY:	DC - 3.5GHz		
VSWR:	<1.20		

CAUTION

THIS SUBSTRATE USES BERYLLIUM OXIDE
 USE CARE WHEN HANDLING.
 DO NOT SCRATCH OR ABRASIVE
 TRIM IN OPEN AREA.

B	12/16/08	SDJ	SDJ	MAI	000740
A	06/08/07	SAF	-	-	000560
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
SAF	MAI	MAI	4" - 1"
DATE	DATE	DATE	.XX \pm .015
06/08/07	06/12/07	06/12/07	.XXX \pm .010



JOHANSON MANUFACTURING CORPORATION
 ROCKAWAY VALLEY ROAD, BDONTON, N.J. 07006 (973)334-2676 FAX (973)334-2954
 ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION