


POWER DERATING

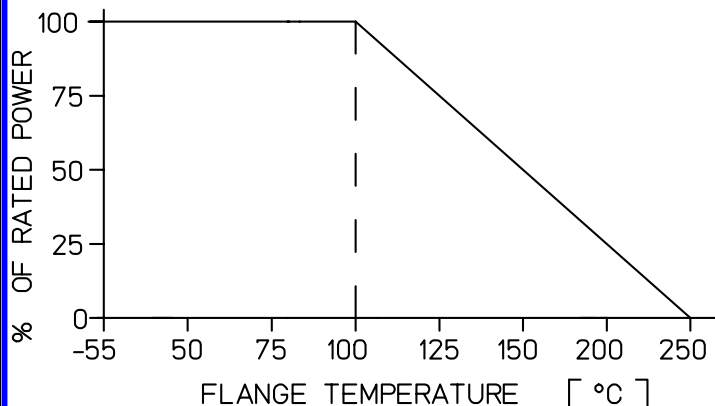

NOTES:

- 1) RoHS COMPLIANT
- 2) EPOXY PROTECTIVE COAT
- 3) Ni/Ag PLATED
- 4) THICK FILM RESISTIVE ELEMENT

MI DRG. NO.

CA3725A0307C-08A

REV.

**CA3725A0307C-08 A**

**CHIP ATTENUATOR, HIGH POWER ALN**

SPECIFICATIONS


FILE: ATNOUT

POWER MAX (WATTS):	150 CW
ATTENUATION	30dB (±0.5dB)
FREQUENCY	VSWR
DC - 3000 MHz	1.2 : 1
DIMENSIONS IN BRACKETS ARE [mm]	

EPOXY OVERCOAT

.013 [0.32] (REF) (TYP)

.005 [0.13] (2X)

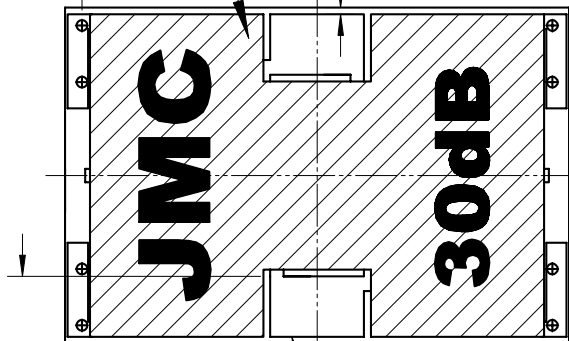

.050 [1.27] (2X)

.035 [0.89] (2X)

.070 [1.78] (2X)

Ni/Ag PLATED METALLIZATION PAD (2X) (TYP)

Ni/Ag PLATED BACKPRINT


.040 [1.02]

.250 [6.35]

.065 [1.65]

.375 [9.53]

.01 [0.25]

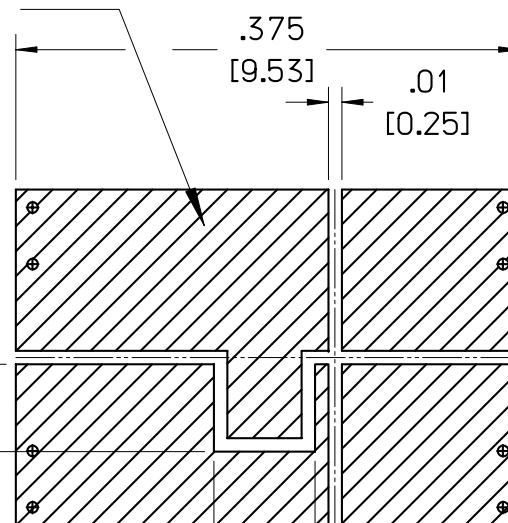

.08 [1.91]

A	05/20/10	MAI	-	-	000838
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
MAI	MAI	MAI	7" = 1"
DATE	DATE	DATE	.XX ± .015
05/20/10	05/21/10	05/21/10	.XXX ± .005



**JOHANSON MANUFACTURING CORPORATION**

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954  
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL