


MI DRG. NO.

JCC-1002-2A

REV.

JCC-1002-2 A

COUPLER, 90°, 0.5 - 2.5 GHz, 400W

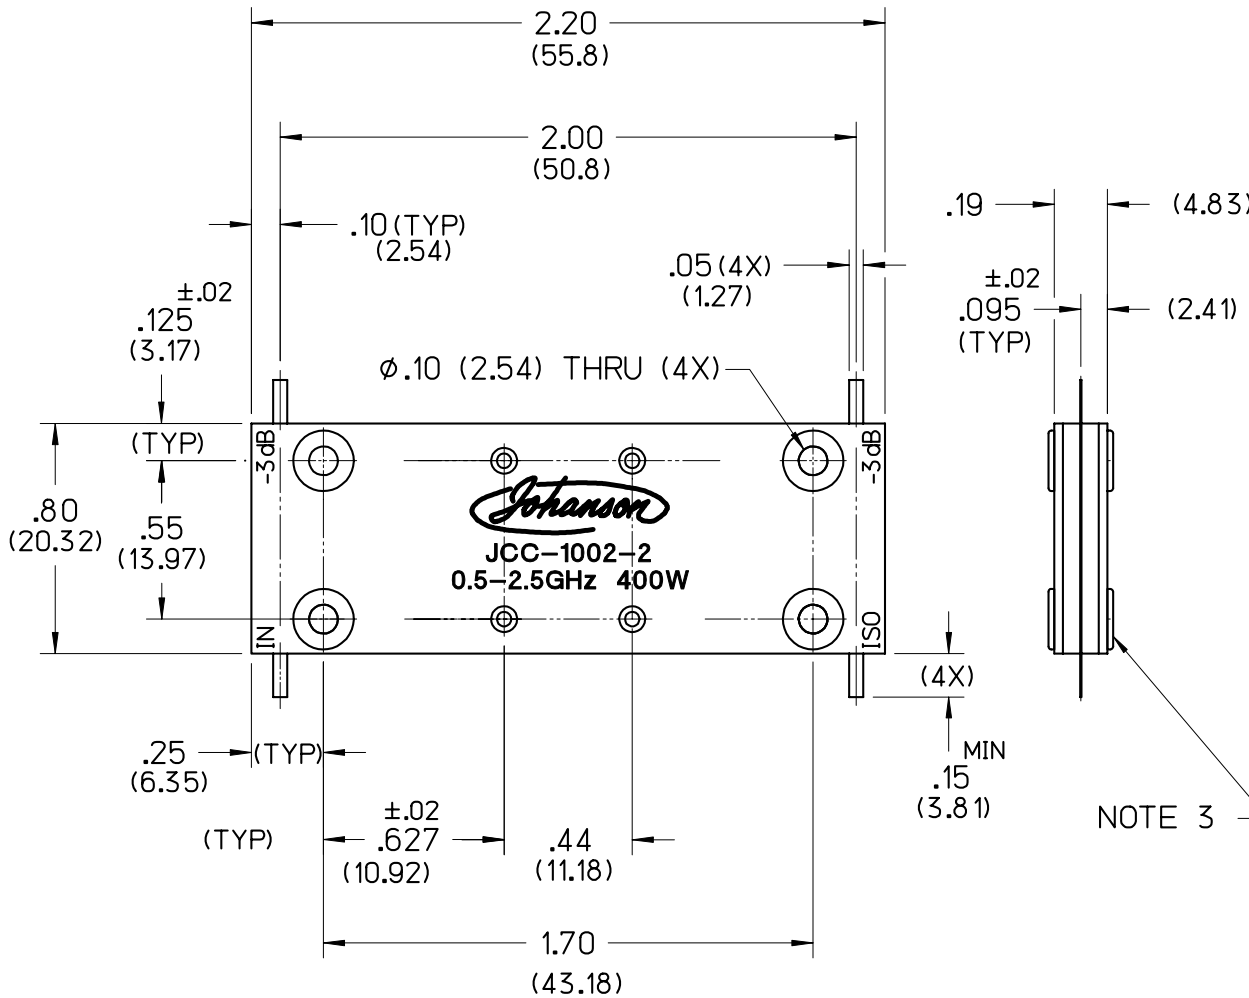


ELECTRICAL SPECIFICATIONS		FILE: COUPOUT
FREQUENCY	0.5 - 2.5 GHz	
INSERTION LOSS	< 0.50 dB	
VSWR	< 1.30:1	
ISOLATION	> 18 dB	
AMPLITUDE BALANCE	±0.65 dB	
PHASE BALANCE	±5°	
POWER	400 WATT	
TEMPERATURE	-55°C TO 85°C	

NOTES:

1. LEAD MATERIAL 99.99% PURE SILVER .005 IN. THK
2. RoHS COMPLIANT
3. .03 (.76) MAX EYELET PROJECTION
.22 (5.58) MAX EYELET DIAMETER (TYP EACH SIDE)
4. DIMENSIONS - INCHES
DIMENSIONS - (mm) & ARE FOR REFERENCE

OPTIONAL SURFACE MOUNT PAD CONFIGURATION: PART# JCC-1002-2SM

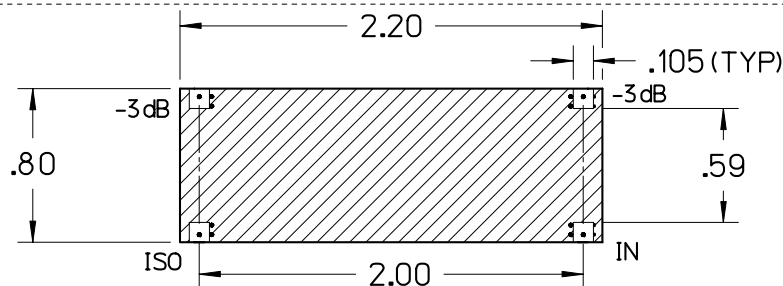

PRELIMINARY

LEVEL	DATE	DRN.	CHK.	APP.	ECN
A	6/23/09	RJV	-	-	NONE
REVISIONS					
DRN.	CHK.	APP.	SCALE		
RJV	—	—	1.5" = 1"		
DATE	DATE	DATE	.XX ±.02 (.50)		
6/23/09	—	—	.XXX±.005(.127)		



JOHANSON MANUFACTURING CORPORATION
 ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
 ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL