

RF400BB13-010 C

HIGH POWER BeO RESISTOR

SPECIFICATIONS


FILE RESOUT

POWER MAX (WATTS):	400 CW
RESISTANCE	50 OHMS (±5%)
FREQUENCY RANGE	DC-0.5GHz
CAPACITANCE	9pF


NOTES

1. RoHS COMPLIANT
2. GAP WELDED LEADS (99.99% PURE SILVER).
3. ALUMINA COVER.
4. COPPER NICKEL PLATED FLANGE (PER QQ-N-290).
5. THICK FILM RESISTIVE ELEMENT

DIMENSIONS IN BRACKETS INDICATE [mm]

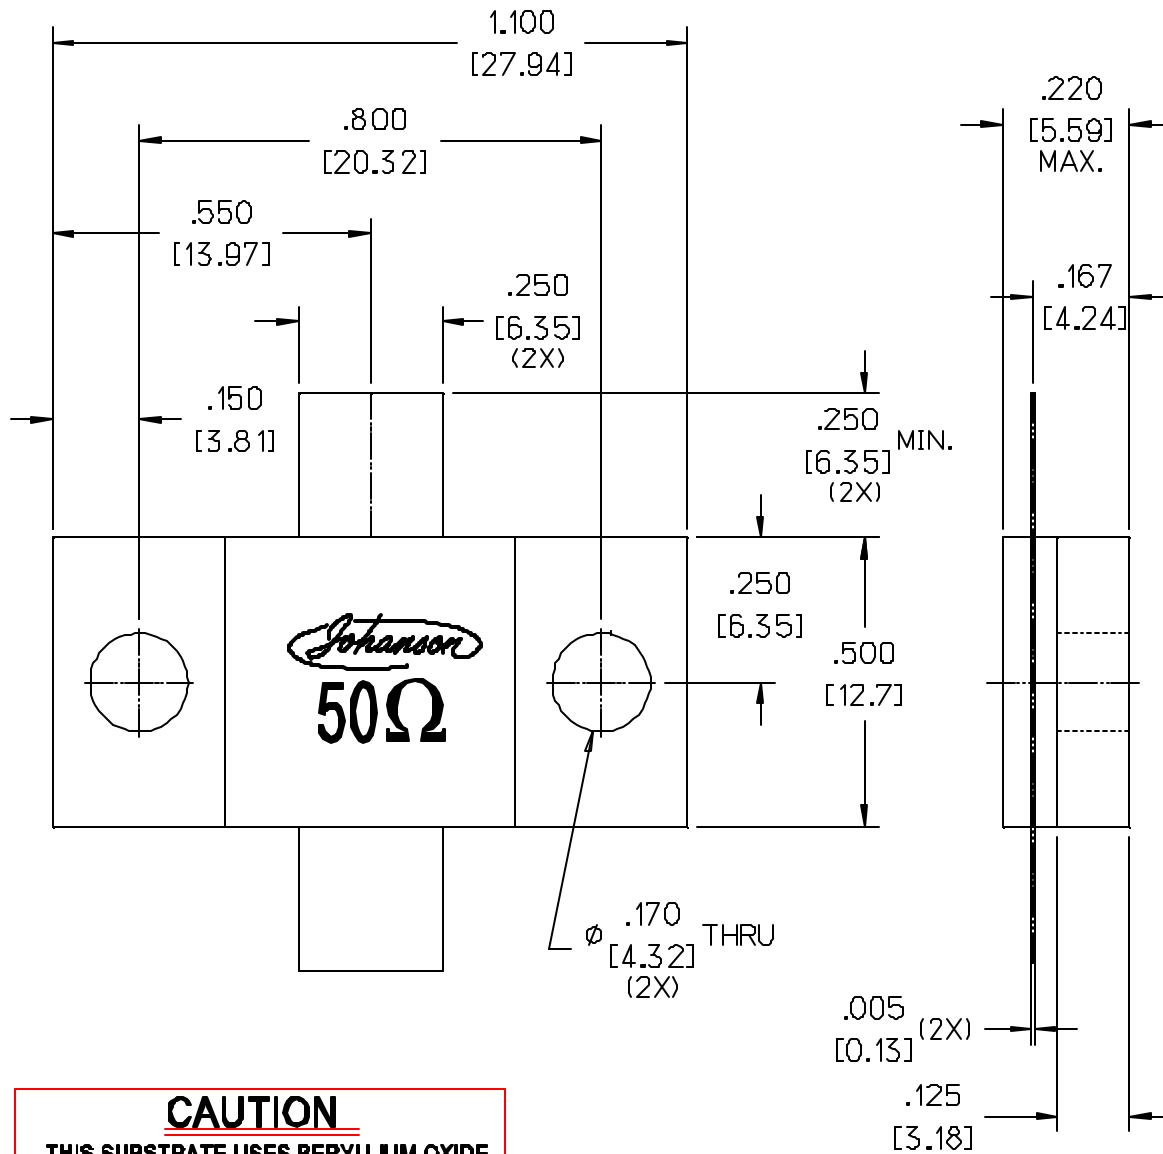

Johanson
50Ω

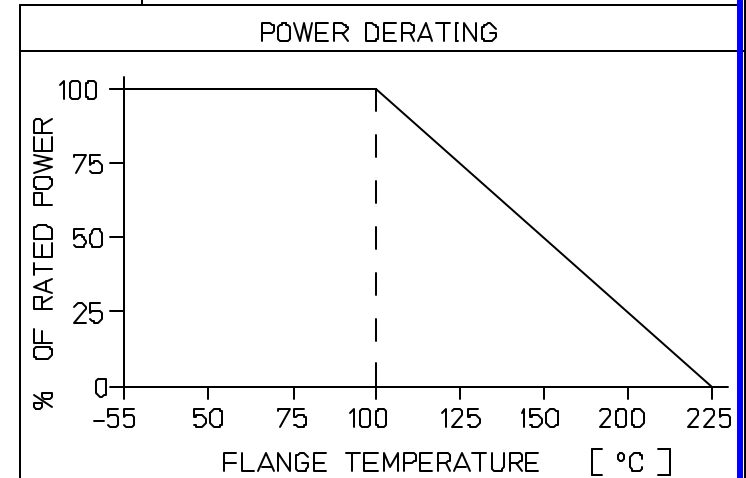

CAUTION
THIS SUBSTRATE USES BERYLLIUM OXIDE
USE CARE WHEN HANDLING.
DO NOT SCRATCH OR ABRASIVE
TRIM IN OPEN AREA.

C	08/10/09	SDJ	SDJ	MAI	000792
B	08/06/09	SDJ	SDJ	MAI	000785
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
MAI	MAI	MAI	3' - 1'
DATE	DATE	DATE	.XX±.015 [38]
03/25/09	03/26/09	03/26/09	.XX±.010 [25]



JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BDONTON, N.J. 07005 (973)334-2676 FAX (973)334-2854
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION