

MI DRG. NO.

CT1X1BB5CA

REV.


CT1X1BB5C

A

CHIP TERMINATION, HIGH POWER BEO

CAUTION
 THIS SUBSTRATE USES BERYLLIUM OXIDE
 USE CARE WHEN HANDLING
 DO NOT SCRATCH OR ABRASIVE
 TRIM IN OPEN AREA.

SPECIFICATIONS		FILE:TERMOUT
POWER MAX (WATTS):	800 CW	
RESISTANCE	50 OHMS (±5%)	

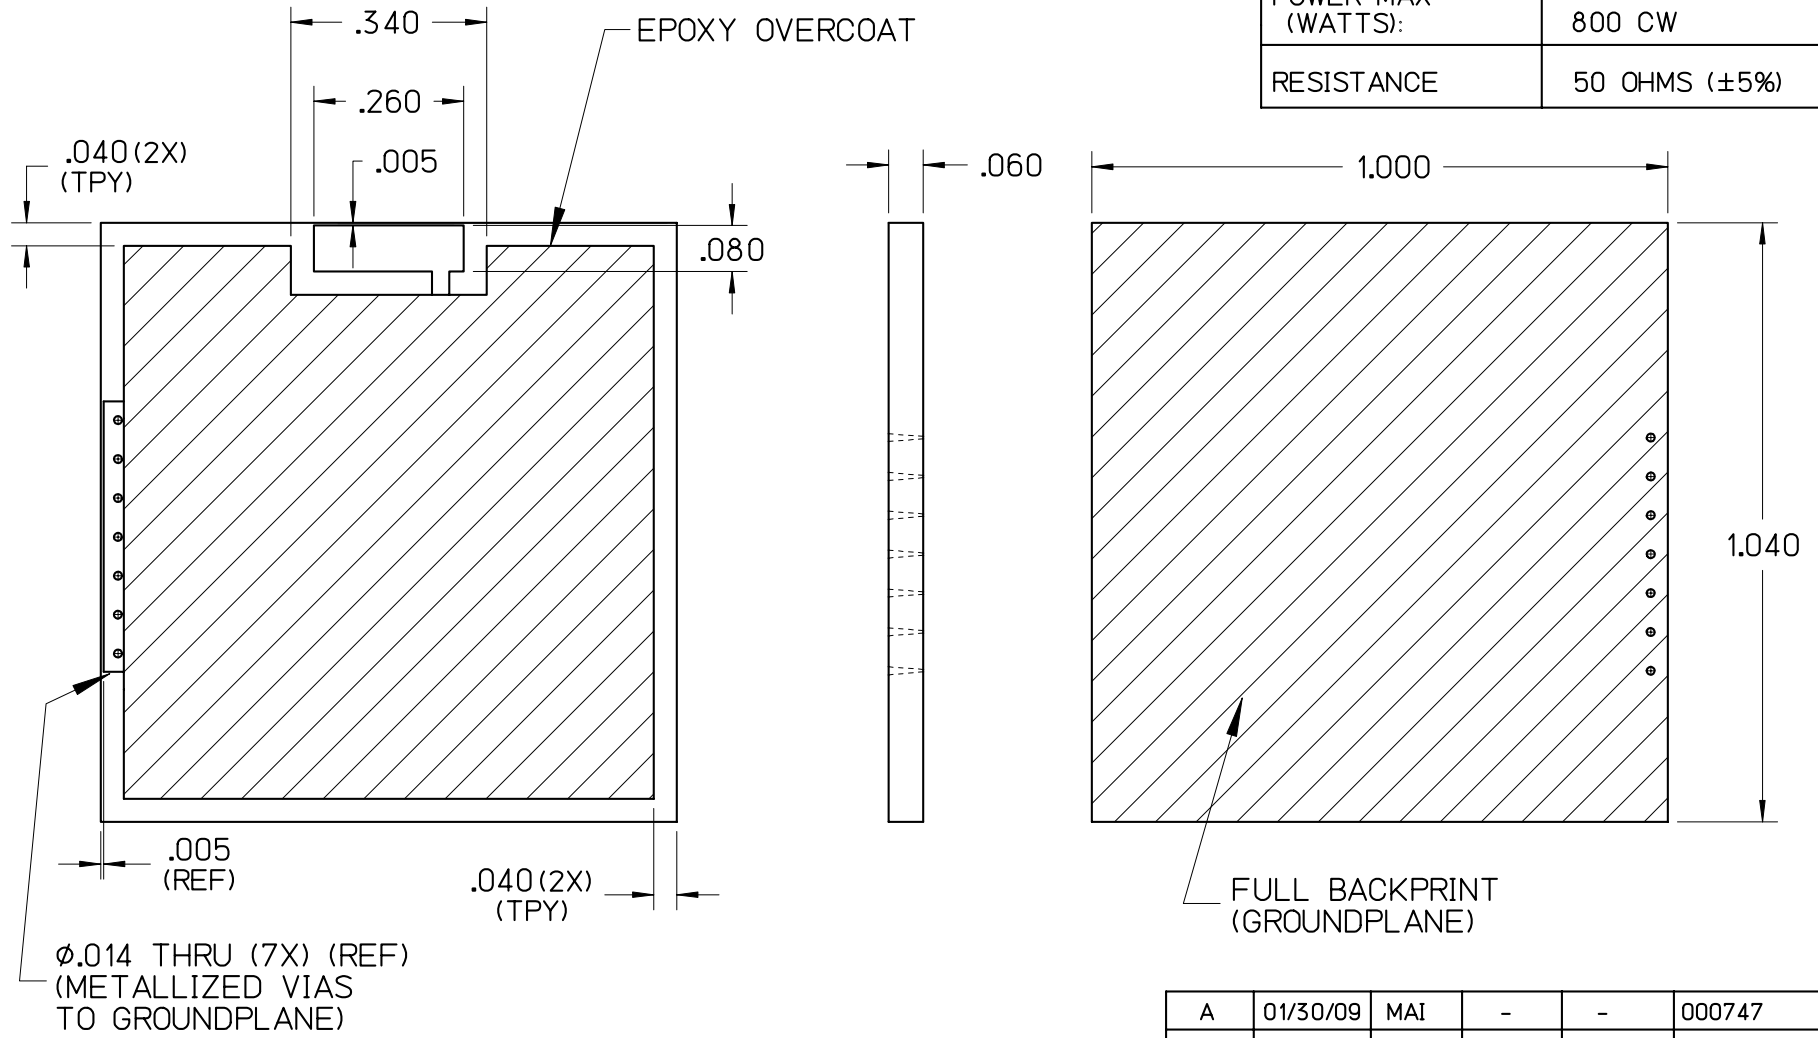

A	01/30/09	MAI	-	-	000747
LEVEL	DATE	DRN.	CHK.	APP.	ECN
REVISIONS					
DRN.	MAI	CHK.	MAI	APP.	MAI
DATE	01/30/09	DATE	01/30/09	DATE	01/30/09
					SCALE
					2" = 1"
					.XX ± .015
					.XXX ± .005



JOHANSON MANUFACTURING CORPORATION
 ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
 ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL