


TF020BB3L-040 A

HIGH POWER BeO TERMINATION

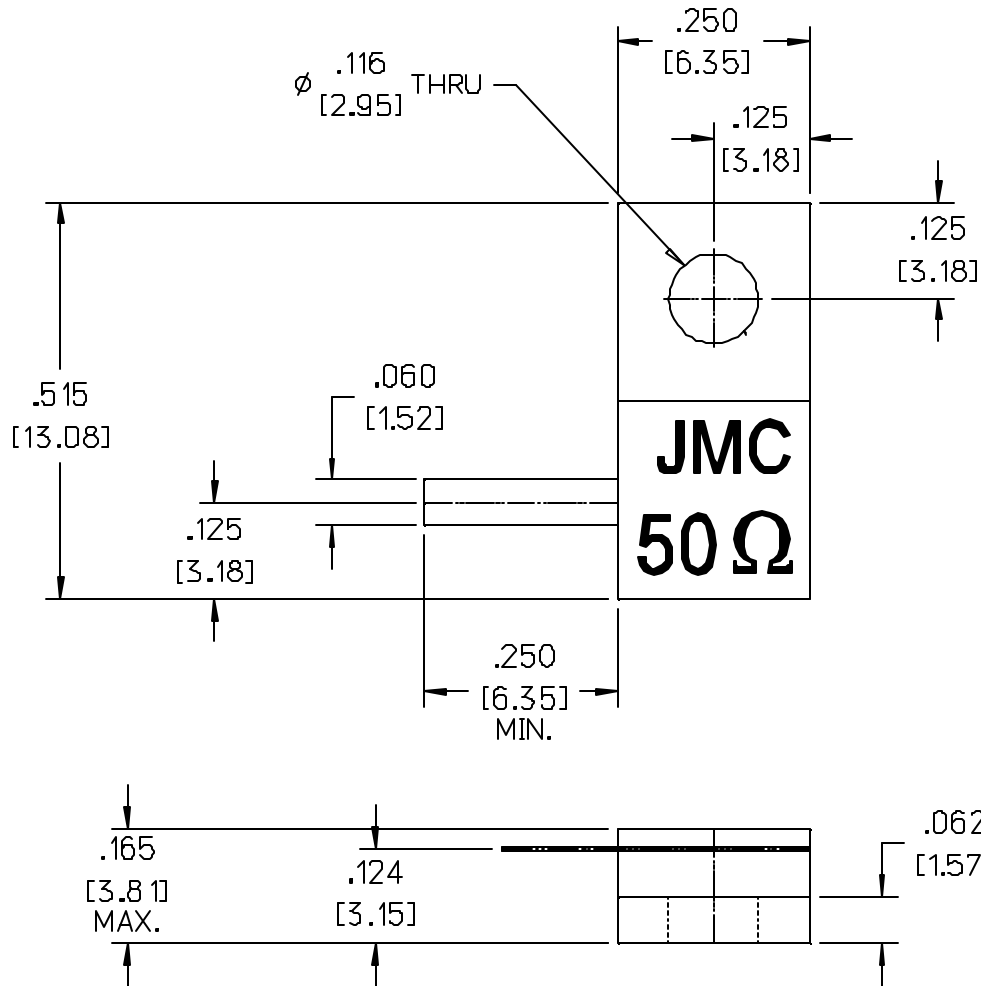

SPECIFICATIONS	FILE TERMOUT
POWER MAX (WATTS)	20 CW
RESISTANCE	50 OHMS (±5%)
FREQUENCY	DC - 6GHz
VSWR	1.25:1
DIMENSION IN BRACKETS INDICATE [mm]	

CAUTION

**THIS SUBSTRATE USES BERYLLIUM OXIDE
USE CARE WHEN HANDLING.
DO NOT SCRATCH OR ABRASIVE
TRIM IN OPEN AREA.**

A	05/15/09	SDJ	-	-	000763
LEVEL	DATE	DRN.	CHK.	APP.	ECN
REVISIONS					
DRN.	CHK.	APP.	SCALE		
SDJ	SDJ	MAI	4" - 1"		
DATE	DATE	DATE	.XX±.015	[.381]	
05/15/09	05/15/09	05/21/09	.XXX±.010	[.254]	



JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BORDENTON, N.J. 07006 (973)534-2676 FAX (973)534-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION