

MI DRG. NO.

TF020BB3LD


REV.

TF020BB3L

D

**HIGH POWER BeO TERMINATION
(B20B-T3L)**

SPECIFICATIONS	FILE: TERMOUT
POWER MAX (WATTS):	20 CW
RESISTANCE	50 OHMS (±5%)

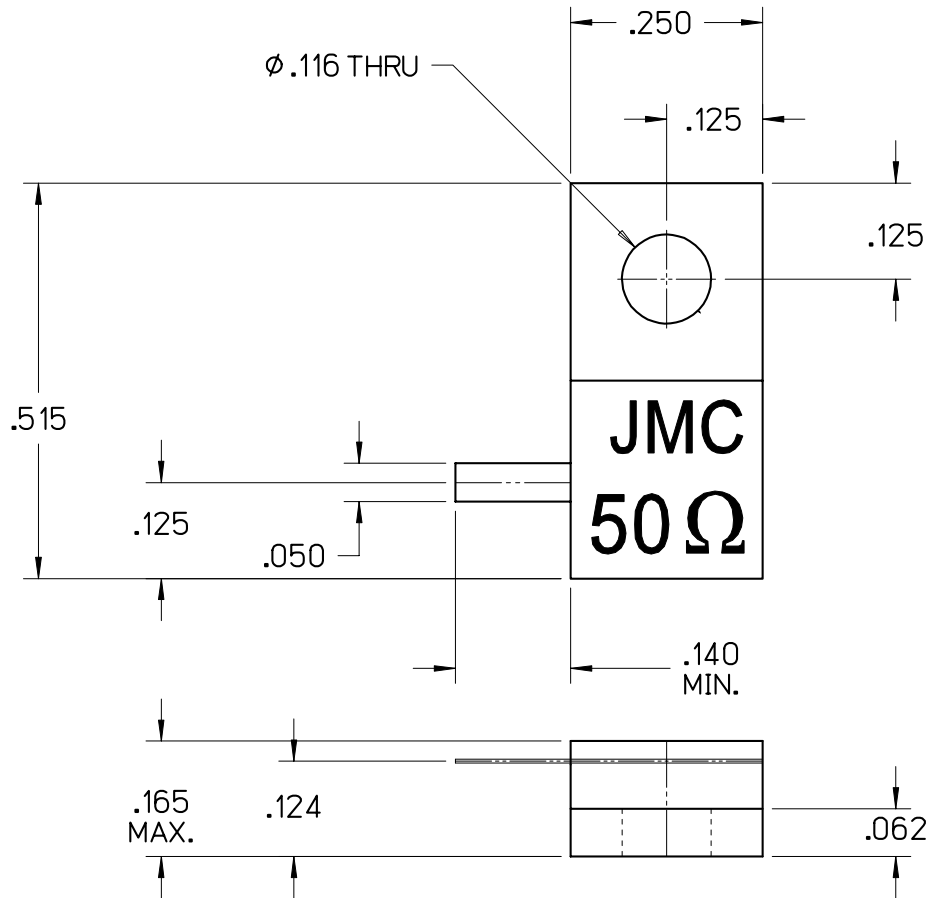

CAUTION

THIS SUBSTRATE USES BERYLLIUM OXIDE
USE CARE WHEN HANDLING.
DO NOT SCRATCH OR ABRASIVE
TRIM IN OPEN AREA.

D	10/29/07	MLD	MAI	MAI	000607
C	10/17/06	MLD	MAI	MAI	000457
B	07/10/06	MLD	MAI	MAI	000409
A	05/30/06	MLD	-	-	000406
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
MLD	MAI	MAI	4" = 1"
DATE	DATE	DATE	.XX ± .015
05/30/06	06/08/06	06/08/06	.XXX ± .010



JOHANSON MANUFACTURING CORPORATION
ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL