MI DRG. NO. TF050BF6LB REV.

TF050BF6L B

HIGH POWER BeO TERMINATION (B50F–T6L)

SPECIFICATIONS	FILE: TERMOUT
POWER MAX (WATTS):	50 CW
RESISTANCE	25 OHMS (±5%)

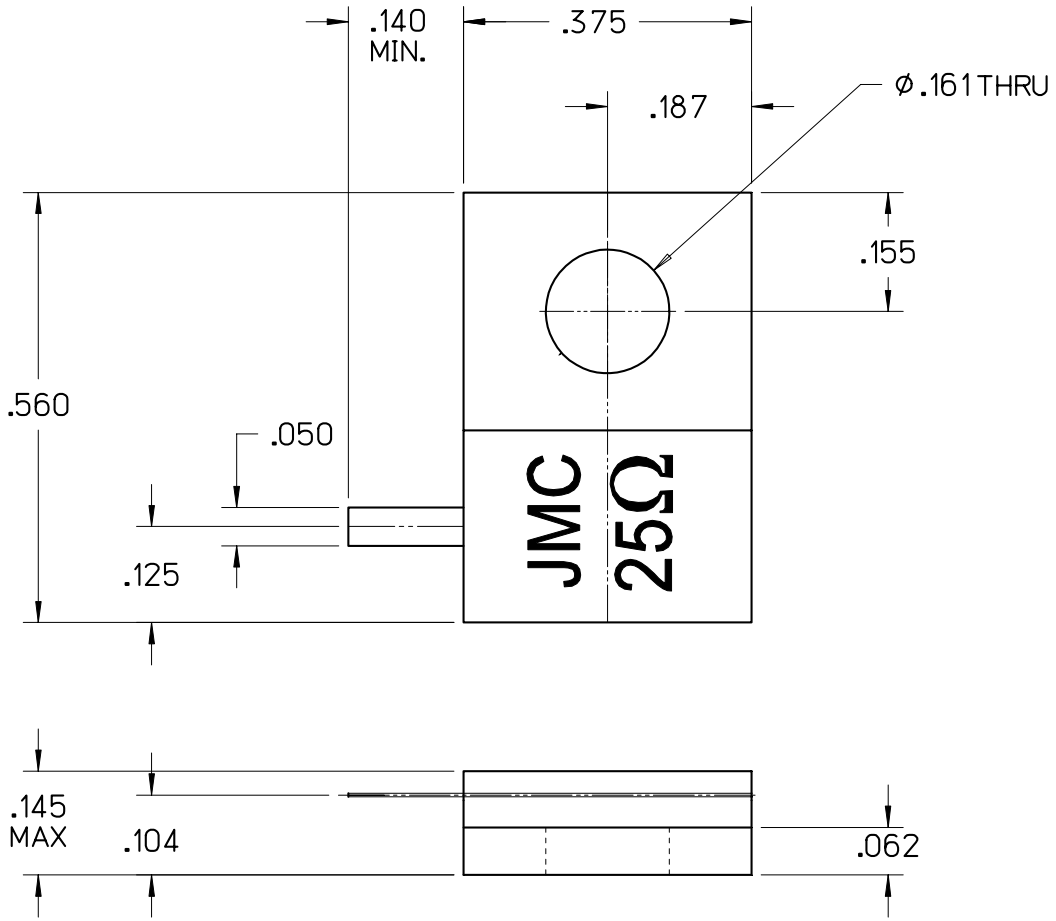

CAUTION

THIS SUBSTRATE USES BERYLLIUM OXIDE
USE CARE WHEN HANDLING.
DO NOT SCRATCH OR ABRASIVE
TRIM IN OPEN AREA.

LEVEL	DATE	DRN.	CHK.	APP.	ECN
B	10/30/07	MLD	MAI	MAI	000607
A	10/30/06	MAI	-	-	000457

REVISIONS

DRN.	CHK.	APP.	SCALE
MAI	MAI	MAI	4" = 1"
DATE 10/30/06	DATE 10/30/06	DATE 10/30/06	.XX ± .015 .XXX ± .010

JOHANSON MANUFACTURING CORPORATION
ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL