

TF150BB09 E**HIGH POWER BeO TERMINATION
(B150B-T9)**

SPECIFICATIONS

FILE: TERMOUT

POWER MAX
(WATTS):

150 CW

RESISTANCE

50 OHMS (±5%)

FREQUENCY


DC - 1000 MHz

VSWR

1.20 : 1

CAUTION

THIS SUBSTRATE USES BERYLLIUM OXIDE
USE CARE WHEN HANDLING.
DO NOT SCRATCH OR ABRASIVE
TRIM IN OPEN AREA.

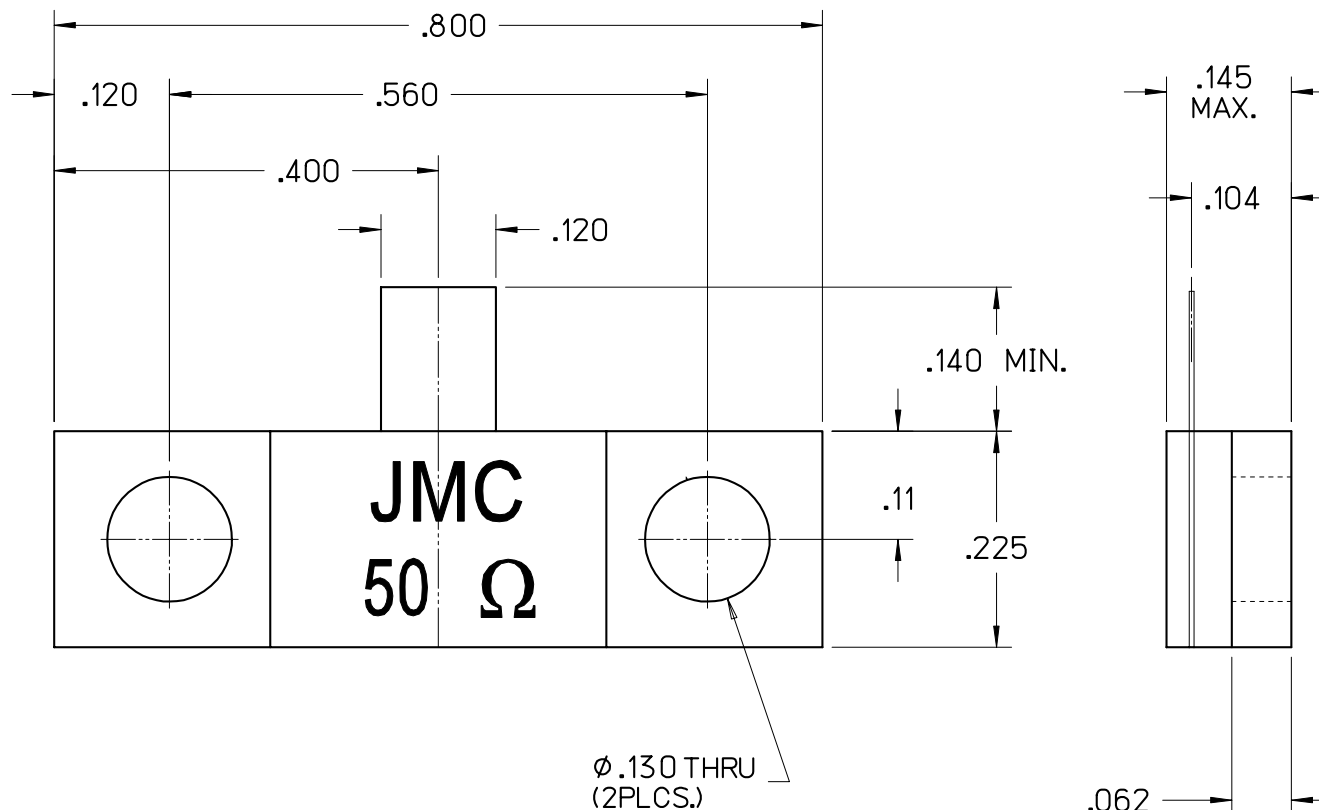

E	7/24/09	RJV	RJV	7/24/09 MAI	000789
D	10/30/07	MLD	MAI	MAI	000607
C	10/18/06	MLD	MAI	MAI	000457
B	07/10/06	MLD	MAI	MAI	000409
A	05/31/06	MLD	-	-	000406
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
MLD	MAI	MAI	5" = 1"
DATE	DATE	DATE	.XX ± .015
05/31/06	06/08/06	06/08/06	.XXX ± .010



JOHANSON MANUFACTURING CORPORATION
ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION