AF030B0203A

BeO Flange Attenuator

Power: 30 Watts (CW)
Attenuation: 20 dB ± 0.5 dB
Substrate: BeO

RoHS COMPLIANT

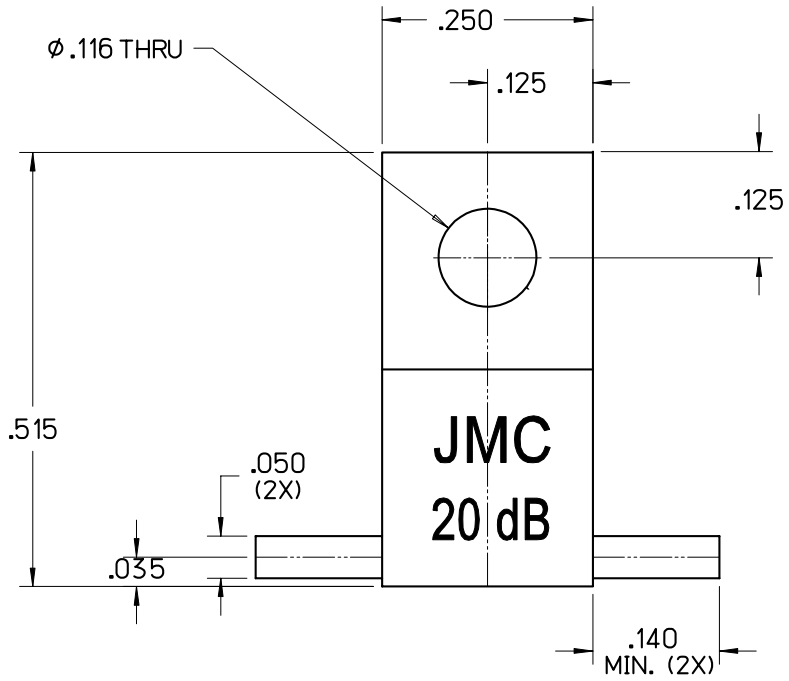

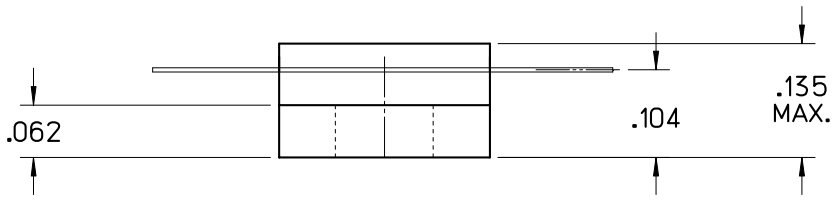

CAUTION

THIS SUBSTRATE USES BERYLLIUM OXIDE
USE CARE WHEN HANDLING.
DO NOT SCRATCH OR ABRASIVE
TRIM IN OPEN AREA.

For detailed information regarding this product or sample request contact Johanson Sales

Johanson Manufacturing Corporation • 301 Rockaway Valley Road, Boonton, New Jersey 07005 • Phone 973.334.2676 • Fax 973.334.2954